

Installation for 49901


Two colors available : Black string shade:49901B / White string shade: 49901W




This item is ETL listed and suitable only for indoor dry locations.

➔ START FROM HERE

1. Before assembling lighting fixtures, make sure you have electrical wiring experience or have your fixture installed by a qualified licensed electrician.
2. Prepare everything in a clear area.
3. Put on gloves all the time during this installation.
4. Take out fixture and glass from box.
5. Read instructions carefully before you assemble.

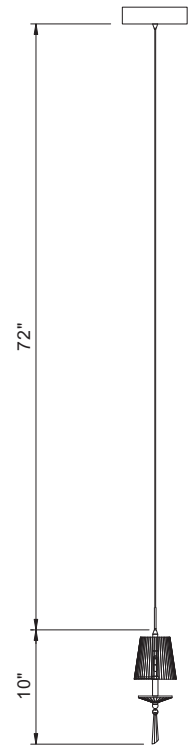


1. Take out a hanging bar (A) for mounting by threading two screws (B).
2. Then mount hanging bar (A) carefully to junction box by using the two screws (C) provided.

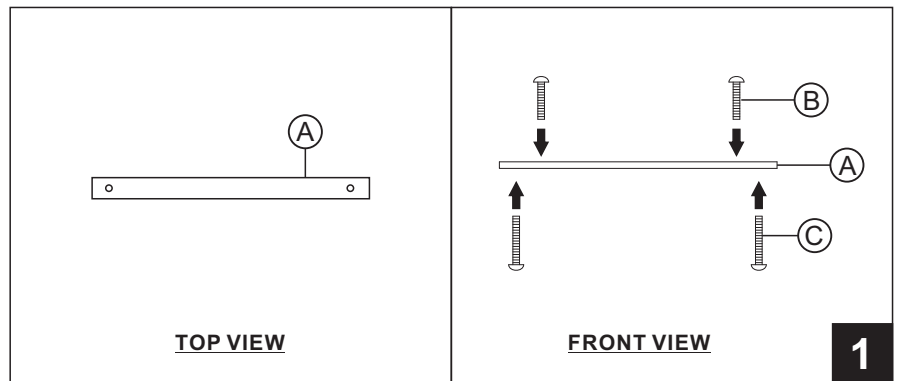


1. Take out everything from the box.
The box contains: one lamp, one installation sleeve, two wire nuts, two collector cable bands.
2. Determine the overall length you need the assembled fixture to be.




1. Determine the over all length you need the assembled fixture to be.
2. Adjust the fixture height: To extend the length by releasing the cord (E) or shorten the cord (E) by pressing (F), then release (F) to lock and fasten the wire.

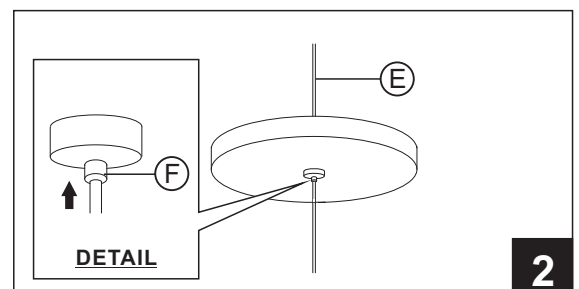

1. Use a collector cable band to tighten the pendant cord (E) above ceiling canopy.

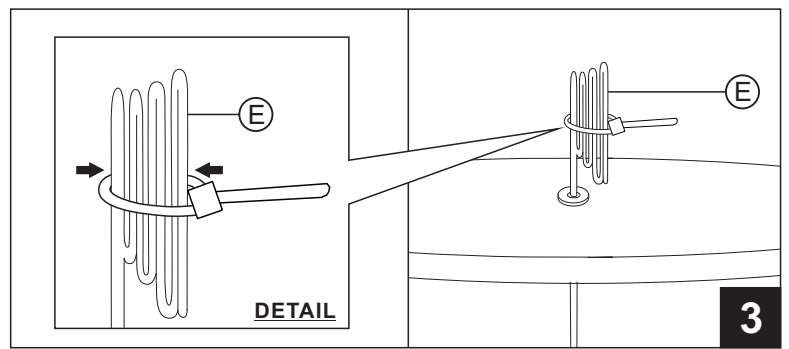

1. Before starting the electrical installation, make sure to turn off the power.
2. Checking the ceiling canopy in accordance with local electrical codes before making all connections.
3. To connect the two black fixture wire (G) to the hot 120 volt power line wire with a wire nut.
4. Than to connect the white fixture wire (H) to the neutral 120 volt power line wire with a wire nut.
5. Carefully to tread on both ball knobs (J)x2 and screws (I)x2 to secure ceiling canopy (K) to the ceiling.

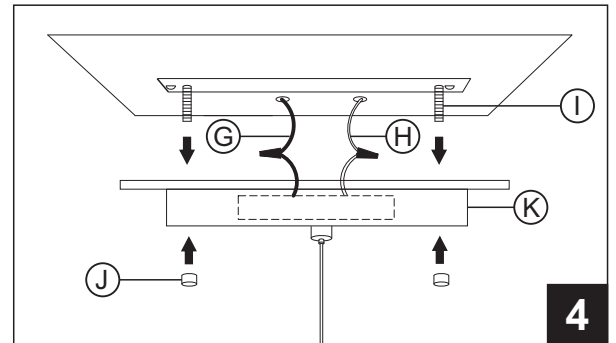

1. Fixture can now be lamped accordingly.

