Two lamp wall sconce
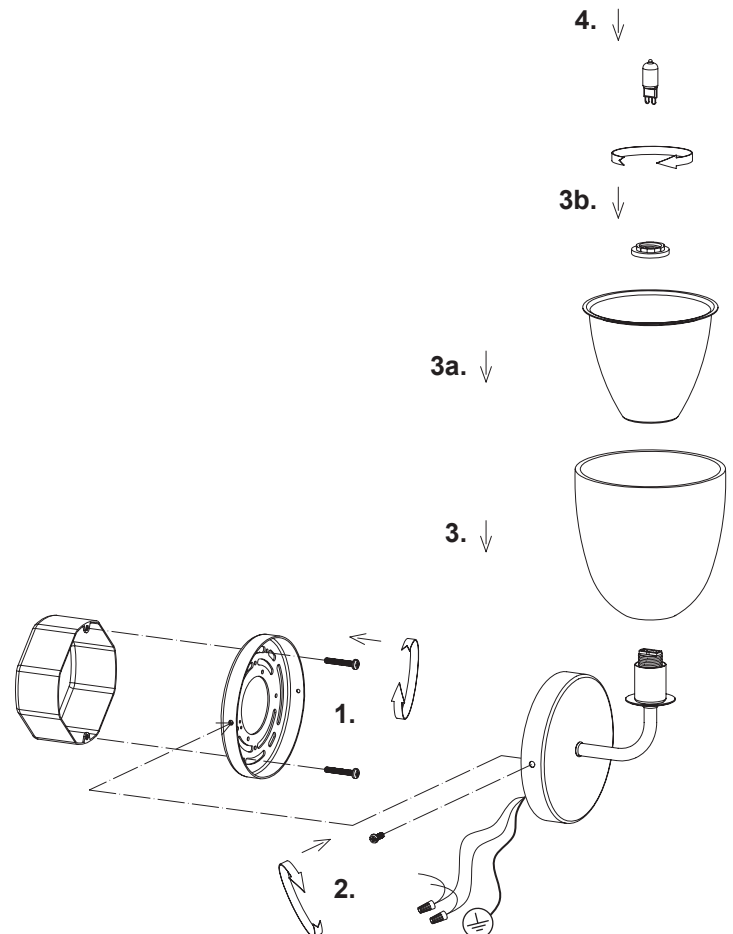
1. Remove the fixture from its original packaging. Remove the canopy mounting plate from within the canopy and attach it to the electrical junction box, and wall, using the two screws provided in the hardware package.

2. Attach the canopy to the mounting plate, which is attached to the electrical junction box on the wall. First attach all wiring with the provided marrets (white to white "N", black to black "L", ground to ground "G"). Push the canopy onto the mounting plate, and align the two holes on the canopy to the holes on the mounting plate. Once aligned, screw in the two screws provided to secure the fixture to the wall.

3. Gently place a glass light cover onto the fixture by inserting the light bulb socket into the hole in the bottom of the cover. (**3a**) Take the metal shade and guide it gently through the center of the bigger glass piece while inserting the light bulb socket into the hole in the bottom of the metal shade. (**3b**) Now, with both pieces installed on the fixture, install the locking nut to secure the glass cover and the metal shade to the fixture (do not over tighten).

4. Now install the G-9 light bulb of the correct wattage.

5. You have now completed the installation of your fixture, please enjoy.

START FROM HERE

- Make sure power is completely off at the fuse box.
- Have your fixture installed by a qualified licensed electrician
- Prepare everything in clear area.
- Wear gloves at all times during this installation.
- Read instructions carefully before you start assembly.
- Keep this instruction sheet for future reference.
  Technical Support: 1-877-452-6858

4. ↓

3b. ↓

3a. ↓

3. ↓

1.

2.

KUZCO
L I G H T I N G