## **LED Ceiling Canopy**




## START FROM HERE

- Make sure **POWER** is **COMPLETELY OFF** at the fuse box
- Have your fixture installed by a qualified licensed electrician
- · Prepare everything in a clear area
- · Wear gloves at all time during this installation
- · Read instructions carefully before you start assembly
- Keep this installation sheet for future reference

**Technical Support:** 1-855-855-8926

- 1. Remove the canopy from it's original packaging
- 2. Remove the mounting plate (1c) from within the canopy (2a) by removing the decorative nut (2c)
- **3.** Attach the mounting plate (1c) to the electrical junction box (1a) using the junction box screws (1e) provided in the hardware package
- **4.** To change fixture height, push and hold wire gripper (2g), slide wire to desired length and then release wire gripper (2g) to secure
- **5.** Wire strain relief (for thicker wire) (see illustration 1): Remove wire grippers (2g). Pull wire through nut (3a), washer (3b), threaded cylinder (3c) and wire strain relief (3d). Secure threaded cylinder (3c) to canopy (2a) with nut (3a) and washer (3b). Thread wire strain relief (3d) to threaded cylinder (3c). Slide wire to desired length by pushing and pulling and secure with set screw (3e)
- **6.** Make proper electrical connections (**black** to **hot** "L", **white** to **neutral** "N", **ground** to "**GND**") with wire nuts **(1b)** provided in hardware package
- Align and insert mounting plate screw (1d) through hole on canopy (2a), secure with decorative nut (2c)

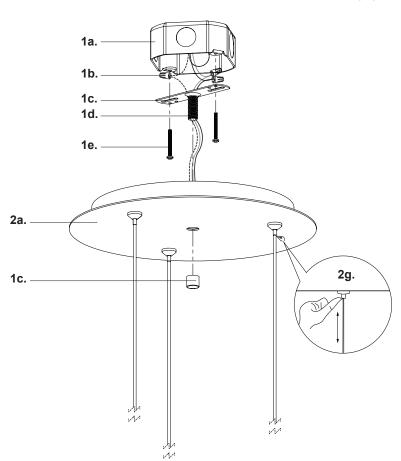

## **Illustration 1** (Wire strain relief for thicker wires)

