## LED Flush Mount

## START FROM HERE


- Make sure POWER is COMPLETELY OFF at the fuse box
- Have your fixture installed by a qualified licensed electrician
- Prepare everything in a clear area
- Wear gloves at all times during this installation
- Read instructions carefully before you start assembly
- Keep this installation sheet for future reference

Technical Support: 1-855-855-8926

- **1.** Remove fixture from its original package
- 2. Attach crossbar (1c) to electrical junction box (1a) using screws provided (1e) in hardware package
- Make proper electrical connections (black to hot "L", white to neutral "N", ground to "GND") with wire nuts (1b) provided in hardware package
- **4.** Install Pan-Head Crossbar Mounting Screws (1d) halfway into threaded holes on crossbar (1c). Align keyholes on backplate (2a) and module to Pan-Head Crossbar Mounting Screws (1d) heads, insert and turn, and then secure with screw driver.
- **5.** Secure backplate (2a) to ceiling with additional screws (1g) and anchors (1f) if necessary
- **6.** Choose color temperature by using slider (5a)
- 7. Twist shade (3a) onto backplate (2a) to secure



- This Kuzco LED fixture comes with pre-wired LED module(s)
- Unless instructed, Do Not touch any part of the LED module(s) as any unnecessary contact with the module could cause permanent damage
- For dimming, an ELV (Electronic Low Voltage) type of dimmer is required
- 120V input

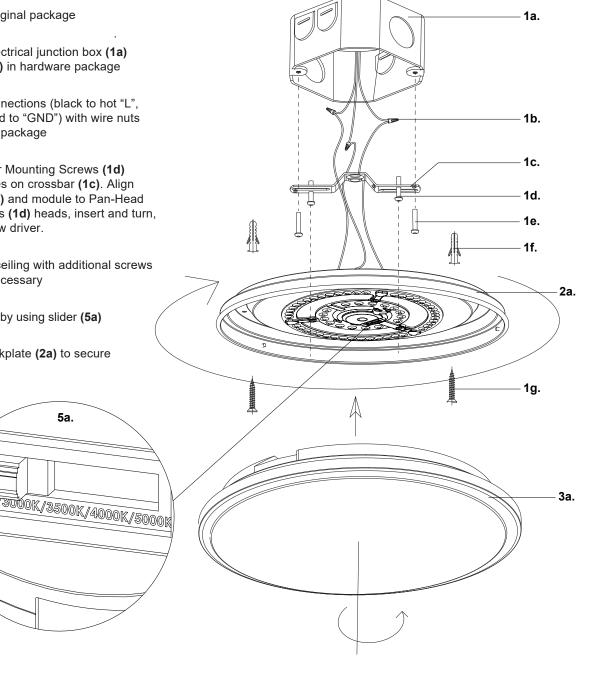



## FM43315-5CCT INSTALLATION SHEET