Ceiling LED Pendant

PD82524 INSTALLATION SHEET

START FROM HERE


- Make sure POWER is COMPLETELY OFF at the fuse box
- Have your fixture installed by a qualified licensed electrician
- Prepare everything in a clear area
- Wear gloves at all time during this installation
- Read instructions carefully before you start assembly
- Keep this installation sheet for future reference

Technical Support: 1-855-855-8926

- **1.** Remove fixture from its original package
- 2. Separate mounting plate (1c) from canopy (2a) by removing canopy screws (2f)
- **3.** Attach mounting plate (1c) to electrical junction box (1a) using screws provided (1e) in hardware package
- **4.** Secure mounting plate (1c) to mounting surface with anchors (1f) and screws (1g)
- **5.** Determine hanging height of fixture by securing rods (2d) to canopy (2a) and fixture (3a) after feeding fixture wires (LED+ and LED-) through rods
- **6.** Make proper electrical connections between LED and DC driver, LED- Negative, LED+ Positive using quick connector provided (See Illustration 1 and refer to diagram on driver)
- Make proper electrical connections (black to hot "L", white to neutral "N", ground to "GND") with wire nuts (1b) provided in hardware package and place driver (4a) inside canopy (2a)
- 8. Attach canopy (2a) to mounting plate (1c) with canopy screws (2f)

Please Note:

- This Kuzco LED fixture comes with pre-wired LED module(s)
- Unless instructed, Do Not touch any part of the LED module(s) as any unnecessary contact with the module could cause permanent damage
- Use ELV (Electronic Low Voltage) or TRIAC type of dimmer for dimming application
- 120V input

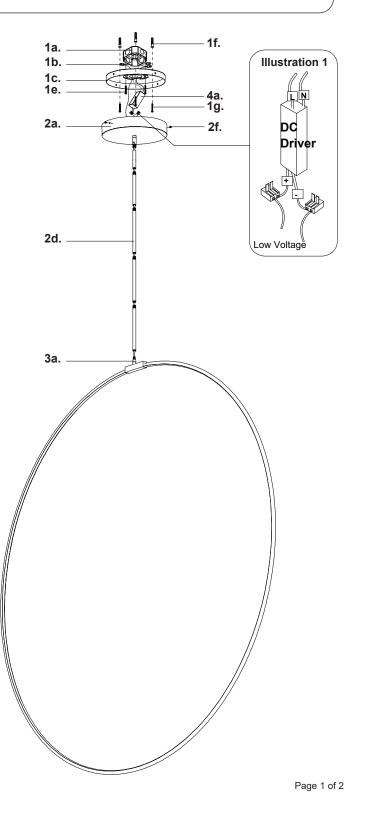

19054 28th Avenue Surrey, BC Canada V3Z 6M3 T: 604 538 7162 TF: 1-855 85 KUZCO F: 604 538 7196 W: kuzcolighting.com 20211015

Ceiling LED Pendant

PD82524 INSTALLATION SHEET

START FROM HERE

- Make sure POWER is COMPLETELY OFF at the fuse box
- Have your fixture installed by a qualified licensed electrician
- Prepare everything in a clear area
- Wear gloves at all time during this installation
- Read instructions carefully before you start assembly
- Keep this installation sheet for future reference

Technical Support: 1-855-855-8926

WALL MOUNT OPTION

- 1. Remove fixture from its original package
- 2. Separate mounting plate (1c) from canopy (2a) by removing canopy screws (2f)
- **3.** Separate swivel (5c) from canopy (2a) by removing washer and nut (4b)
- **4.** Attach mounting plate (**1c**) to electrical junction box (**1a**) using screws provided (**1e**) in hardware package
- **5.** Secure mounting plate (1c) to mounting surface with anchors (1f) and screws (1g)
- **6.** Secure thread (**5a**) to canopy (**2a**) with washer and nut (**4b**), followed by canopy rod (**5b**), swivel (**5c**), fixture rod (**3b**) and fixture (**3a**) after feeding fixture wires (LED+ and LED-) through all components
- 7. Make proper electrical connections between LED and DC driver, LED- Negative, LED+ Positive using quick connector provided (See Illustration 1 and refer to diagram on driver)
- Make proper electrical connections (black to hot "L", white to neutral "N", ground to "GND") with wire nuts (1b) provided in hardware package and place driver (4a) inside canopy (2a)
- Attach canopy (2a) to mounting plate (1c) with canopy screws (2f)

Please Note:

- This Kuzco LED fixture comes with pre-wired LED module(s)
- Unless instructed, Do Not touch any part of the LED module(s) as any unnecessary contact with the module could cause permanent damage
- Use ELV (Electronic Low Voltage) or TRIAC type of dimmer for dimming application
 120V input
- 5c. 5b. 5a. 2a. 2f. 4b. 4a. 1e. 1c. 1b. 1a. 1g 1f. 3b. **Illustration 1** 3a. Driver Low Voltag

KUZCO

19054 28th Avenue Surrey, BC Canada V3Z 6M3 T: 604 538 7162 TF: 1-855 85 KUZCO F: 604 538 7196 W: kuzcolighting.com 20240327