Ceiling LED Pendant

START FROM HERE


- Make sure **POWER** is **COMPLETELY OFF** at the fuse box
- Have your fixture installed by a qualified licensed electrician
- Prepare everything in a clear area
- · Wear gloves at all time during this installation
- · Read instructions carefully before you start assembly
- Keep this installation sheet for future reference

Technical Support: 1-855-855-8926

Please Note:

- This Kuzco LED fixture comes with pre-wired LED module(s)
- Unless instructed, Do Not touch any part of the LED module(s) as any unnecessary contact with the module could cause permanent damage
- Use ELV (Electronic Low Voltage) or TRIAC type of dimmer for dimming application
- 120V input

- 1. Remove fixture from its original package
- 2. Separate mounting plate (1c) from canopy (2a) by removing canopy screws (2f)
- **3.** Attach mounting plate (1c) to electrical junction box (1a) using screws provided (1e) in hardware package
- **4.** Secure mounting plate (1c) to mounting surface with anchors (1f) and screws (1g)
- Determine hanging height of fixture by securing rods (2d) to canopy (2a) and fixture (3a) after feeding fixture wires (LED+ and LED-) through rods
- **6.** Make proper electrical connections between LED and DC driver, LED- Negative, LED+ Positive using quick connector provided (See Illustration 1 and refer to diagram on driver)
- Make proper electrical connections (black to hot "L", white to neutral "N", ground to "GND") with wire nuts (1b) provided in hardware package and place driver (4a) inside canopy (2a)
- **8.** Attach canopy (2a) to mounting plate (1c) with canopy screws (2f)

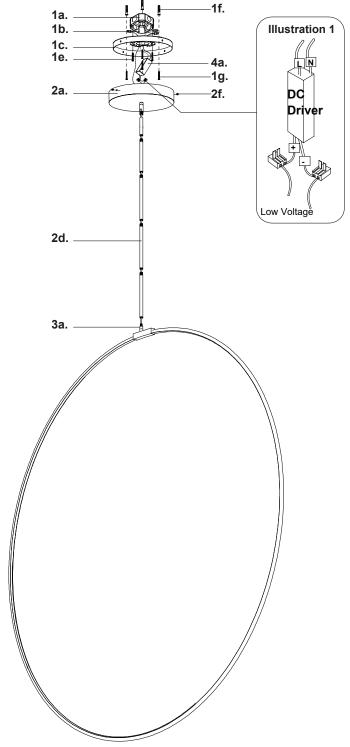



Ceiling LED Pendant

START FROM HERE

- Make sure **POWER** is **COMPLETELY OFF** at the fuse box
- Have your fixture installed by a qualified licensed electrician
- · Prepare everything in a clear area
- · Wear gloves at all time during this installation
- · Read instructions carefully before you start assembly
- Keep this installation sheet for future reference

Technical Support: 1-855-855-8926

Please Note:

- This Kuzco LED fixture comes with pre-wired LED module(s)
- Unless instructed, Do Not touch any part of the LED module(s) as any unnecessary contact with the module could cause permanent damage
- Use ELV (Electronic Low Voltage) or TRIAC type of dimmer for dimming application
- 120V input

WALL MOUNT OPTION

- 1. Remove fixture from its original package
- 2. Separate mounting plate (1c) from canopy (2a) by removing canopy screws (2f)
- **3.** Separate swivel (5c) from canopy (2a) by removing washer and nut (4b)
- 4. Attach mounting plate (1c) to electrical junction box (1a) using screws provided (1e) in hardware package
- **5.** Secure mounting plate (1c) to mounting surface with anchors (1f) and screws (1g)
- Secure thread (5a) to canopy (2a) with washer and nut (4b), followed by canopy rod (5b), swivel (5c), fixture rod (3b) and fixture (3a) after feeding fixture wires (LED+ and LED-) through all components
- Make proper electrical connections between LED and DC driver, LED- Negative, LED+ Positive using quick connector provided (See Illustration 1 and refer to diagram on driver)
- **8.** Make proper electrical connections (**black** to **hot** "L", **white** to **neutral** "N", **ground** to "**GND**") with wire nuts (**1b**) provided in hardware package and place driver (**4a**) inside canopy (**2a**)
- **9.** Attach canopy (2a) to mounting plate (1c) with canopy screws (2f)

