LED Semi Flush



START FROM HERE


- $\ensuremath{\cdot}$ Make sure $\ensuremath{\mathsf{POWER}}$ is $\ensuremath{\mathsf{COMPLETELY}}$ OFF at the fuse box
- Have your fixture installed by a qualified licensed electrician
- Prepare everything in a clear area
- Wear gloves at all times during this installation
- Read instructions carefully before you start assembly
- Keep this installation sheet for future reference

Technical Support: 1-855-855-8926

- 1. Remove fixture from its original package
- 2. Separate mounting plate (1c) from canopy (2a) by removing canopy screws (2b)
- Attach mounting plate (1c) to electrical junction box (1a) using junction box screws provided (1e) in hardware package
- Make proper electrical connections (black to hot "L", white to neutral "N", ground to "GND") with wire nuts (1b) provided in hardware package and place driver (4a) in canopy (2a)
- **5.** Attach shades (**3b**) to fixture (**3a**) by threading clockwise to secure
- **6.** Attach canopy (2a) to mounting plate (1c) with canopy screws (2b)

Please Note:

- This Kuzco LED fixture comes with pre-wired LED module(s)
- Unless instructed, Do Not touch any part of the LED module(s) as any unnecessary contact with the module could cause permanent damage
- Use ELV (Electronic Low Voltage) or TRIAC type of dimmer for dimming application
- 120V input

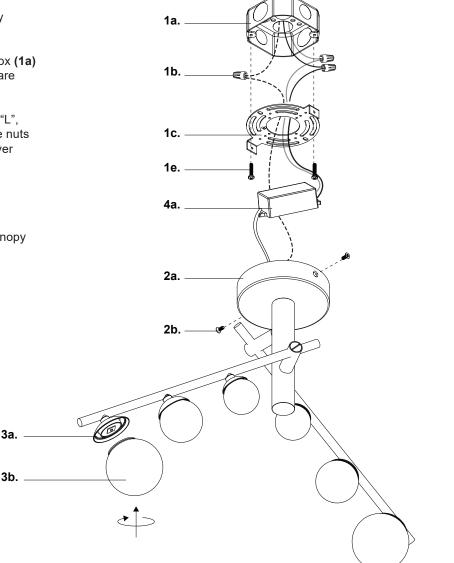



20240227