# RATIO PD31405

#### **PENDANTS**





## **SPECIFICATION DETAILS**


Fixture Dimensions	L5-1/8" x W1/2" x H8-1/4"
Light Source	LED with DC Driver
Wattage	11W
Total Lumens	945lm
Delivered Lumens	BN-657lm
Voltage	120V
Color Temperature	3000K
CRI (Ra)	90CRI
Optional Color Temps	2700K - 5000K Available, Minimum Order Quantities Apply
LED Rated Life	50,000 hours
Dimming	100% - 10%, TRIAC or ELV Dimmer (Not Included)
Diffuser Details	Frosted acrylic diffuser
Adjustable	Yes
Wire Length	120" Max
Wire Type	Clear SSL Wire
Sloped Ceiling Adaptable	Yes
Location	Dry
Illumination Direction	Up and Down
<b>Canopy Dimensions</b>	L5"x W5" x H1-1/4"
Paint Finish	BN02; WH02;

- $\ensuremath{^{\star}}$  For custom options, consult factory for details.
- \* For warranty information, please visit www.kuzcolighting.com/warranty

#### **DESCRIPTION**

**PROJECT** 

An opal plane of diffusive light is suspended and supported by a machined rectilinear frame, emitting luminance upwards and downwards. The visual balance between solid perimeter and open space is derived from the golden ratio for which the product is named. Available in either vertical or horizontal orientation and a selection of finishes.

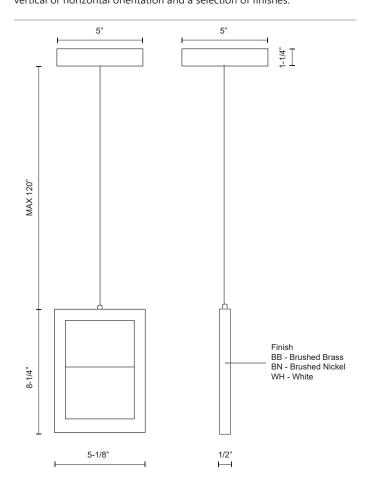



CANADA: 19054 28TH AVENUE - SURREY, BC V3Z 6M3 USA: 3035 E. LONE MOUNTAIN ROAD - LAS VEGAS, NV 89081

WWW.KUZCOLIGHTING.COM
© 2019 KUZCO LIGHTING. ALL RIGHTS RESERVED.

## COMMENT



