## **Incandescent Chandelier**

Please Note:

• 120V input

## START FROM HERE


- Make sure POWER is COMPLETELY OFF at the fuse box
- Have your fixture installed by a qualified licensed electrician
- Prepare everything in a clear area
- Wear gloves at all times during this installation
- Read instructions carefully before you start assembly
- Keep this installation sheet for future reference

Technical Support: 1-855-855-8926

- 1. Remove fixture from its original package
- 2. Separate mounting plate (1c) from canopy (2a) by removing canopy screws (2b)
- Attach mounting plate (1c) to electrical junction box (1a) using junction box screws provided (1e) in hardware package
- Secure mounting plate (1c) to mounting surface with anchors (1f) and screws (1g)
- To change fixture height, remove screw (2c) from canopy (2a) and push or pull wire to your desired length. Secure screw (2c) in canopy (2a) to lock wire in place
- 6. Make proper electrical connections (black to hot "L", white to neutral "N", ground to "GND") with wire nuts (1b) provided in hardware package
- Attach canopy (2a) to mounting plate (1c) with canopy screws (2b)

4a.

8. Insert bulb (4a) into fixture socket

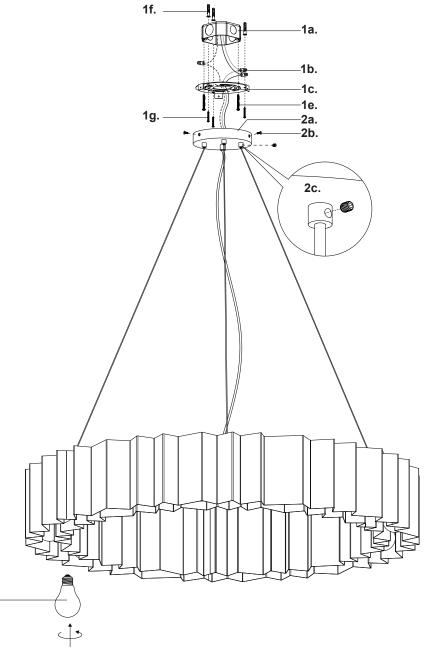

## KUZCC 19054 28th Avenue Surrey, BC Canada V3Z 6M3

19054 28th Avenue Surrey, BC Canada V3Z 6M3 T: 604 538 7162 TF: 1-855 85 KUZCO F: 604 538 7196 W: kuzcolighting.com 20230109 CH58030 INSTALLATION SHEET