## LED Flush Mount

## FM13120-5CCT

## START FROM HERE


- $\ensuremath{\cdot}$  Make sure  $\ensuremath{\mathsf{POWER}}$  is  $\ensuremath{\mathsf{COMPLETELY}}$  OFF at the fuse box
- Have your fixture installed by a qualified licensed electrician
- Prepare everything in a clear area
- Wear gloves at all time during this installation
- Read instructions carefully before you start assembly
- Keep this installation sheet for future reference


## Technical Support: 1-855-855-8926


- 1. Remove fixture from its original package
- 2. Separate mounting plate (1c) from fixture (2a) by removing decorative nuts (2b)
- Align mounting plate screws (1d) to desired orientation, and then attach mounting plate (1c) to electrical junction box (1a) using junction box screws provided (1e) in hardware package
- Make proper electrical connections (black to hot "L", white to neutral "N", ground to "GND") with wire nuts (1b) provided in hardware package
- Align and insert mounting plate screws (1d) through holes on fixture (2a), secure with decorative nuts (2b)
- **6.** Choose color temperature by using slider (5a)
- Place diffuser (2c) inside fixture (2a) and turn diffuser (2c) clockwise until secure



- This Kuzco LED fixture comes with pre-wired LED module(s)
- Unless instructed, Do Not touch any part of the LED module(s) as any unnecessary contact with the module could cause permanent damage
- Use ELV (Electronic Low Voltage) type of dimmer for dimming application
- 120V input

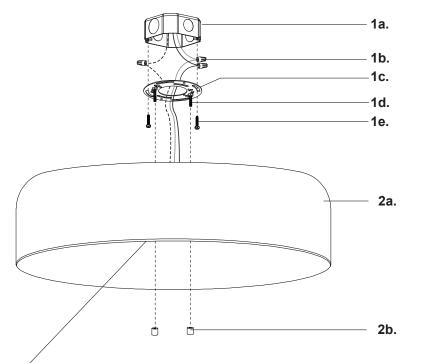





19054 28th Avenue Surrey, BC Canada V3Z 6M3 T: 604 538 7162 TF: 1-855 85 KUZCO F: 604 538 7196 W: kuzcolighting.com 20230926