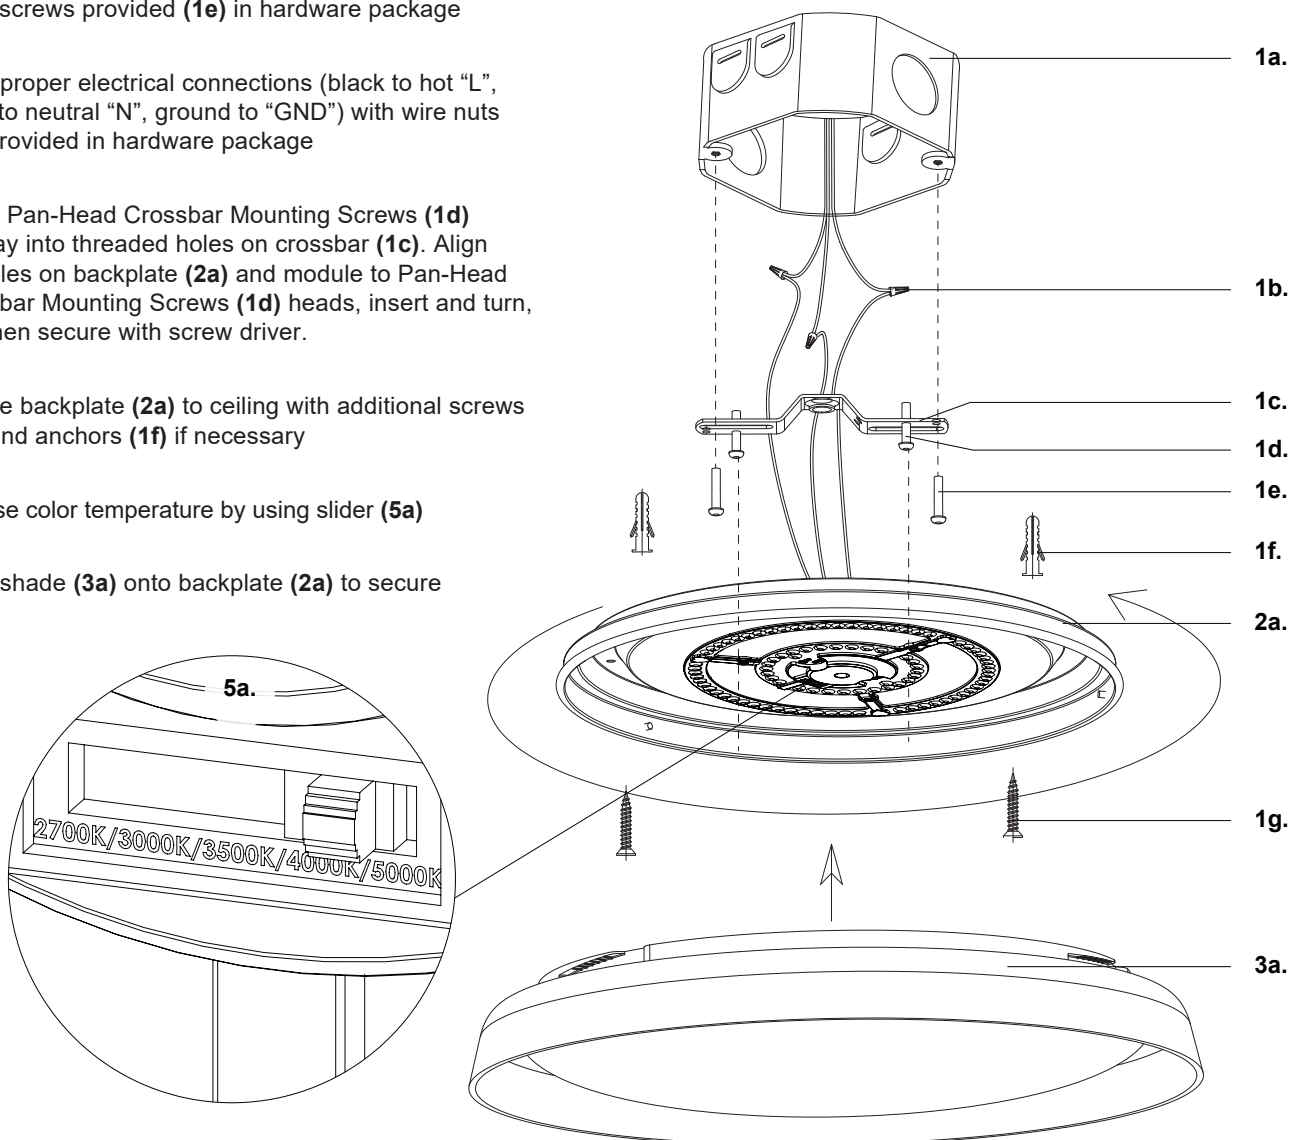# LED Flush Mount

START FROM HERE

• Make sure **POWER** is **COMPLETELY OFF** at the fuse box
• Have your fixture installed by a qualified licensed electrician
• Prepare everything in a clear area
• Wear gloves at all times during this installation
• Read instructions carefully before you start assembly
• Keep this installation sheet for future reference

Technical Support: 1-855-855-8926

Please Note:
• This Kuzco LED fixture comes with pre-wired LED module(s)
• Unless instructed, Do Not touch any part of the LED module(s) as any unnecessary contact with the module could cause permanent damage
• For dimming, an ELV (Electronic Low Voltage) type of dimmer is required
• 120V input

1. Remove fixture from its original package

2. Attach crossbar **(1c)** to electrical junction box **(1a)** using screws provided **(1e)** in hardware package

3. Make proper electrical connections (black to hot "L", white to neutral "N", ground to "GND") with wire nuts **(1b)** provided in hardware package

4. Install Pan-Head Crossbar Mounting Screws **(1d)** halfway into threaded holes on crossbar **(1c)**. Align keyholes on backplate **(2a)** and module to Pan-Head Crossbar Mounting Screws **(1d)** heads, insert and turn, and then secure with screw driver.

5. Secure backplate **(2a)** to ceiling with additional screws **(1g)** and anchors **(1f)** if necessary

6. Choose color temperature by using slider **(5a)**

7. Twist shade **(3a)** onto backplate **(2a)** to secure

5a.

2700K/3000K/3500K/4000K/5000K

1a.
1b.
1c.
1d.
1e.
1f.
2a.
1g.
3a.