Ceiling LED Multi Pendant

START FROM HERE

- Make sure POWER is COMPLETELY OFF at the fuse box
- Have your fixture installed by a qualified licensed electrician
- Prepare everything in a clear area
- Wear gloves at all times during this installation
- · Read instructions carefully before you start assembly
- · Keep this installation sheet for future reference

Technical Support: 1-855-855-8926

Please Note:


- This Kuzco LED fixtures comes with pre-wired LED module(s)
- Unless instructed, Do Not touch any part of the LED module(s) as any unnecessary contact with the module could cause permanent damage
- · Motion sensor: On/Off/Dimming
- 120V input

Remove fixture from its original package

- Separate mounting plate (1c) from canopy (2a) by removing canopy screws (2f) with allen key
- **3.** Attach mounting plate (1c) to electrical junction box (1a) using screws provided (1e) in hardware package
- Secure mounting plate (1c) to mounting surface with anchors (1f) and screws (1h)
- 5. Secure rods together (see Illustration 1 for rod arrangements) and attach to swivel assembly (2g)
- **6.** Make proper electrical connections (black to hot "L", white to neutral "N", ground to "GND") with wire nuts (1b) provided in hardware package
- Attach lamp head (3c) to rod
- Attach canopy (2a) to mounting plate (1c) with canopy screws (2f) and allen key

ILLUSTRATION 1

	G1	G2	G3	G4	G5
	3/4"		10-5/8"	22-3/8"	22"
QUANTITY	1	2	1	1	1

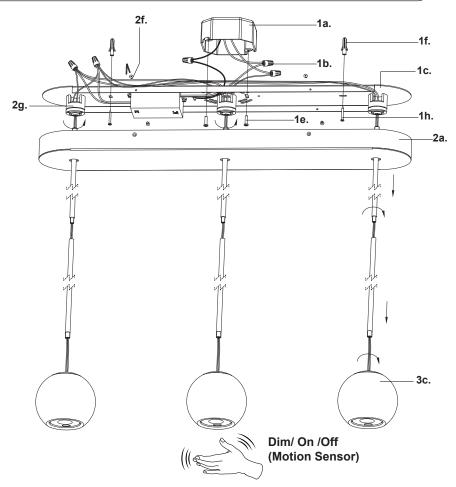


Arrangement 1 Rod Length: 11"


Arrangement 2 Rod Length: 23"


Arrangement 3 Rod Length: 33"


Arrangement 4 Rod Length: 45"


Arrangement 5 Rod Length: 55"














19054 28th Avenue Surrey, BC Canada V3Z 6M3 T: 604 538 7162 TF: 1-855 85 KUZCO F: 604 538 7196 W: kuzcolighting.com 20210702