

Single Lamp Pendant

401041


INSTALLATION SHEET

1. Remove the fixture from its original packaging. Remove the canopy mounting plate from within the canopy and attach it to the electrical junction box on the ceiling using the two screws provided in the hardware package.
2. Turn the nut counter clockwise to remove the nut, locking washer, and ground wire. Push the pins through the hole in the center of the canopy and reinstall the ground wire, locking washer, and nut. Tighten the nut in clockwise direction to secure the pendant to the canopy (do not over tighten).
3. Remove the female connector from the wire connector.
4. Push the wires with the pins inside the female connector until you hear a small click or they are unable to be pulled out. When installed properly the wires should be tight with the connector.
5. Connect the female connector to the male connector clip.
6. Select the desired length you would like the pendant to hang down from the ceiling. To set the pendant hanging height, simply push in the sleeve at the canopy where the wire comes out from. Once the sleeve is pushed in you can push the wire up to shorten, or pull the wire down to lengthen. When you have selected your desired length, just release the sleeve and the wire will be held tightly in place.
7. Attach the canopy to the mounting plate, which is attached to the electrical junction box on the ceiling. First attach all wiring with the provided marrets (white to white "N", black to black "L", ground to ground "G"). Align the two holes from the canopy to the two screws pointing down from the mounting plate. Push the screws through the canopy plate so they are poking through, once this is complete you can screw on the decorative nuts until tight.
8. Now you can install the GY-6.35 light bulb, of the correct wattage, and (8a) the light bulb cover (do not over tighten). (8b) To install the bulb you may have to slide the crystal shade up the pendant cable to access the socket. When the bulb has been installed, gently lower the crystal shade back into place.
9. You have now completed the installation of your fixture, please enjoy.

START FROM HERE

- Make sure power is completely off at the fuse box.
- Have your fixture installed by a qualified licensed electrician
- Prepare everything in clear area.
- Wear gloves at all times during this installation.
- Read instructions carefully before you start assembly.
- Keep this instruction sheet for future reference.

Technical Support: 1-877-452-6858

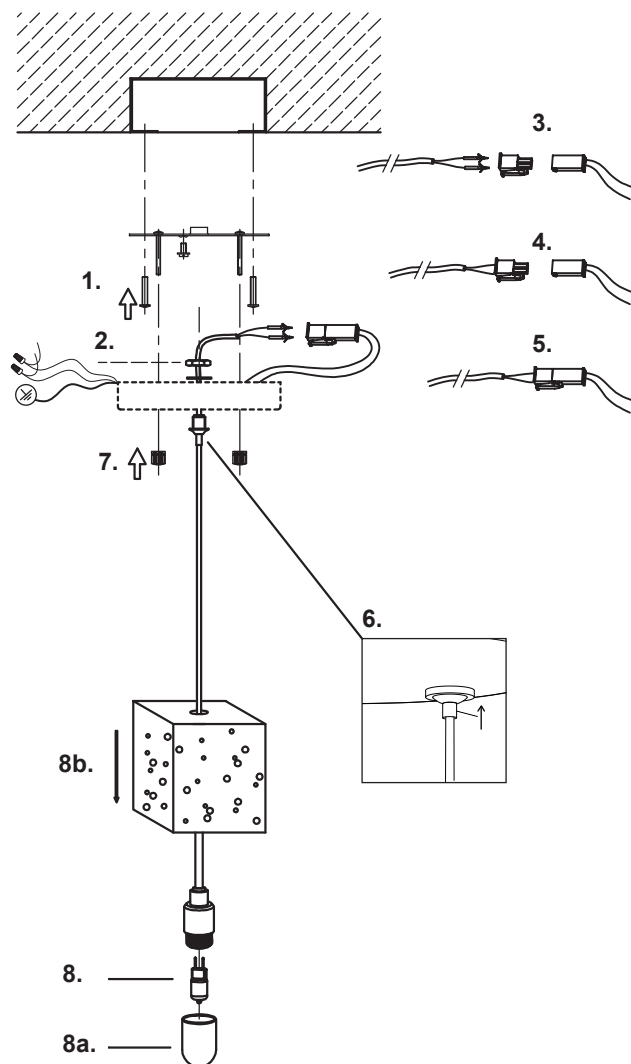

KUZCO

L I G H T I N G

19054 28th Avenue Surrey, BC Canada V3Z 6M3
T: 604 538 7162 TF: 1-855 85 KUZCO F: 604 538 7196
W: kuzcolighting.com
20140623