Exterior Bollard LED

EB48240

1a.

2a.

1b. 2b.

Ø

START FROM HERE

- Make sure POWER is COMPLETELY OFF at the fuse box
- Have your fixture installed by a qualified licensed electrician
- Prepare everything in a clear area
- Wear gloves at all time during this installation
- Read instructions carefully before you start assembly
- Keep this installation sheet for future reference


Technical Support: 1-855-855-8926

- 1. Remove fixture from its original package
- **2.** Provide means to bring supply wiring to bollard in accordance with local code before pouring concrete
- **3.** Secure anchor bolts (1c) to mounting guide plate (1e) with hex nuts and washers provided (1d) before concrete cures
- 4. After concrete is set, replace mounting guide plate (1e) with mounting base (2b), adjust mounting base to desired orientation and then secure with hex nuts and washers (1d)
- **5.** Pull conduit through base plate to make proper electrical connection (black to hot "L", white to neutral "N", ground to "GND") with wire nuts (**1b**) provided in hardware package, tie access wires to avoid contact with ground
- **6.** Align screw holes on fixture base (1a) to mounting base (2b), secure with screws (2a) with Allen Key provided

Please Note:

- This Kuzco LED fixtures come with pre-wired LED module(s)
- ${\boldsymbol{\cdot}}$ Unless instructed, Do Not touch any part of the LED module(s) as any unnecessary
- contact with the module could cause permanent damage
- 120~277V input
- Non-Dimming



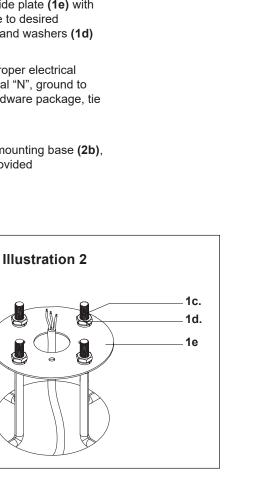

N U Z G C Canada V3Z 6M3 T: 604 538 7162 TF: 1-855 85 KUZCO F: 604 538 7196 W: kuzcolighting.com 20200428